



Wire Type	As Supplied
Sleeve Type	DR25 / convoluted
Transition Type	-
Ident Type	-
Repair Loops	No
Contraind	No
Tolerance	+10 / -0
Label Position	-
Kevlar String	No
Cap Shields	-
Kynar	No
Cirris	No

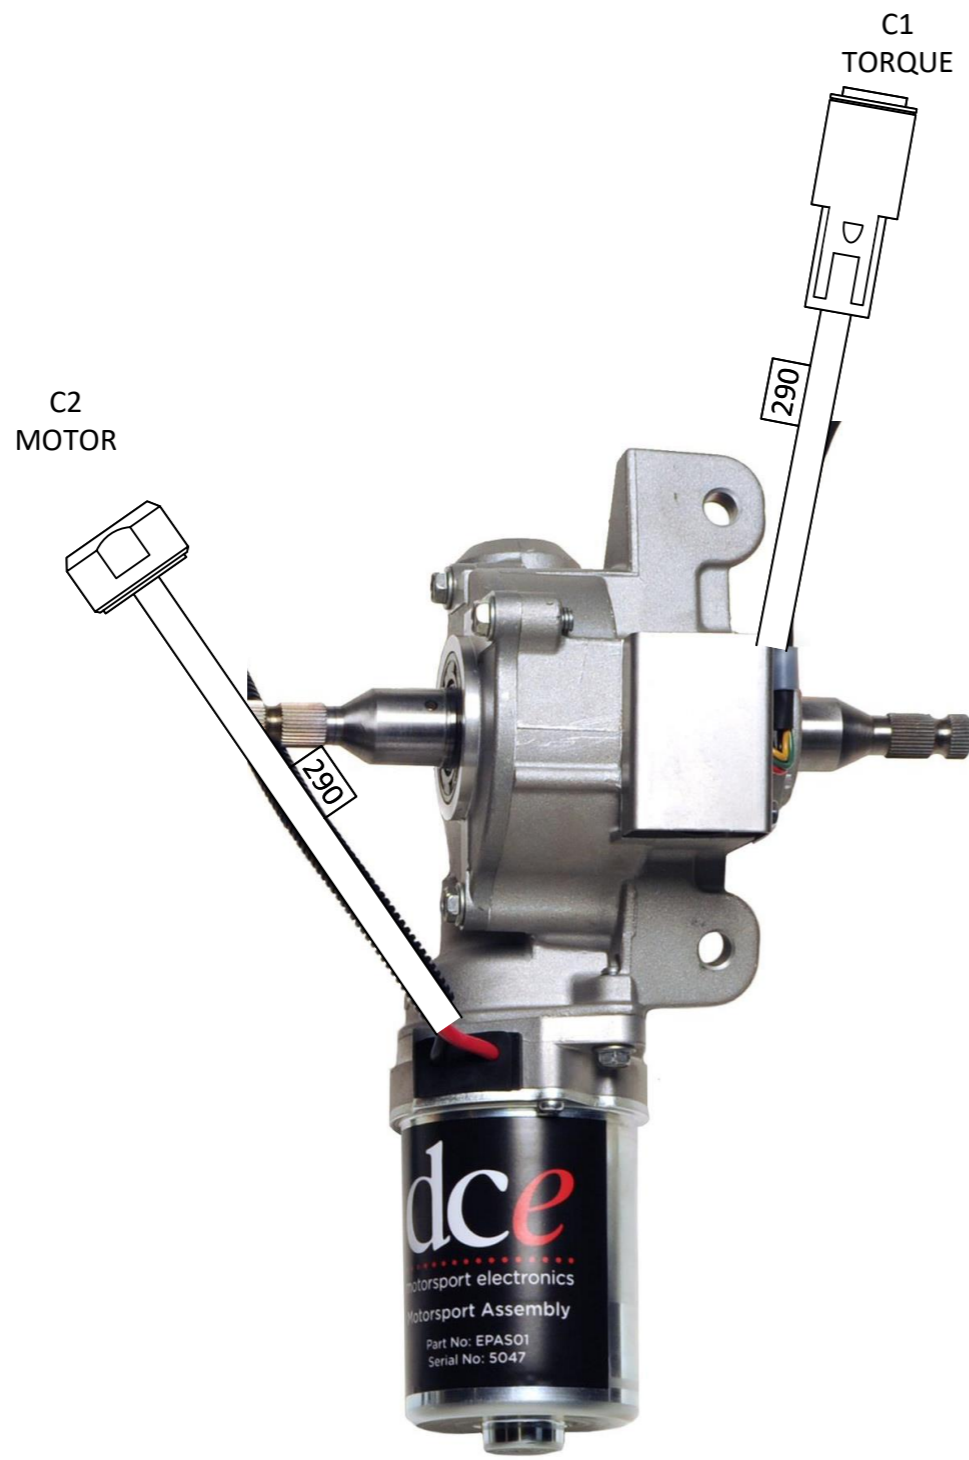

**C1  
TORQUE SENSOR**  
Connector: DTM04-4P + WM4P  
Terminals: 4x 0460-202-20141  
Boot: 202K111-25-0

- 1 – Red (+5V)
- 2 – Black (0V)
- 3 – Green (Sig A)
- 4 – Yellow (Sig B)

**C2  
MOTOR**  
Connector: Yazaki 7123-4123-30  
Terminals: Yazaki 7116-3250  
Lock: Yazaki 7157-6421-80



- 1 – Black (Motor -)
- 2 – Red (Motor +)

DRAWING NOT TO SCALE.  
CONNECTORS SHOWN MAY NOT REPRESENT ACTUAL CONNECTORS SPECIFIED.  
ALL DIMENSIONS IN MILLIMETERS.  
UNLESS OTHERWISE SHOWN, DIMENSION DATUMS ARE CENTER OF TRANSITIONS, FACE OF STRAIGHT CONNECTORS, CONNECTOR CENTRE LINE OF 90 DEGREE CONNECTORS AND HOLE CENTRE LINE OF RING TERMINALS.  
CLOCKING OF 90 DEGREE BOOTS REFERS TO CONNECTOR FACE, KEYWAY AT 12 O'CLOCK, LOOM LEG BEHIND SHOWS TIME.

CUSTOMER:	DCE		REVISION:
TITLE:	EPAS01		
PART NO:	EPAS01		
DRAWN BY:	D.Cunliffe	DATE:	20 <sup>th</sup> July 2020
CHECKED BY:		DATE:	
FILENAME:	EPAS01 Drawing - Customer.vsd		

